


Part No. 902000-902003

SKYLOORD LED BAR


- ✓ CABLE HARNESS WITH SWITCH
- ✓ BUILT IN RELAY
- ✓ 30 100 LUMEN
- ✓ 5-YEAR WARRANTY
- ✓ READY TO PLUG AND PLAY




PART NO.	902000	902001	902002	902003
VOLTAGE	10-32V DC	10-32V DC	10-32V DC	10-32V DC
CONSUMPTION, XPERIENCE-MODE	76W	170W	276W	338W
CONSUMPTION, E-MODE	37W	74W	84W	76W
CONSUMPTION WHITE AND AMBER	6 W / 6 W	12 W / 12 W	12,3 W / 12,3 W	12,8 W / 12,8 W
ACTUAL LUMEN, XPERIENCE-MODE	7700 lm	15 800 lm	26 000 lm	30 100 lm
ACTUAL LUMEN, E-MODE	4000 lm	7600 lm	9200 lm	8500 lm
1 LUX @, XPERIENCE-MODE	517 m	780 m	1037 m	1090 m
1 LUX @, E-MODE	281 m	400 m	439 m	390 m
COLOR TEMPERATURE	5700K	5700K	5700K	5700K
BEAM PATTERN	Extended beam	Long-distance beam	Long-distance beam	Long-distance beam
IP-CLASS	IP68/IP69K	IP68/IP69K	IP68/IP69K	IP68/IP69K
COLOR LENS	Clear	Clear	Clear	Clear
POSITION LIGHT	White and Amber	White and Amber	White and Amber	White and Amber
HELLO FUNCTION	Yes	Yes	Yes	Yes
CONNECTION	Cable	Cable	Cable	Cable
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	226 mm	506 mm	746 mm	986 mm
DEPTH	77,95 mm	77,95 mm	77,95 mm	77,95 mm
HEIGHT	67,45 mm	67,45 mm	67,45 mm	67,45 mm
HEIGHT INCLUDING BRACKET	73,85 mm	73,85 mm	73,85 mm	73,85 mm
OPERATING TEMPERATURE	-35°C · +60°C	-35°C · +60°C	-35°C · +60°C	-35°C · +60°C
E-APPROVED	ECE R148, R149	ECE R148, R149	ECE R148, R149	ECE R148, R149
REF	20	2 x 20	2 x 20	2 x 20
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10

PART NO. 902000

E-MODE

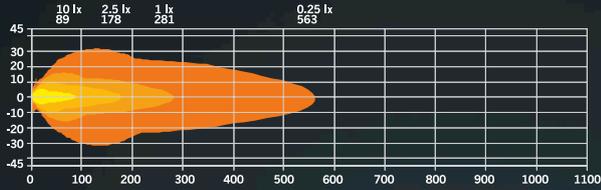


XPERIENCE MODE

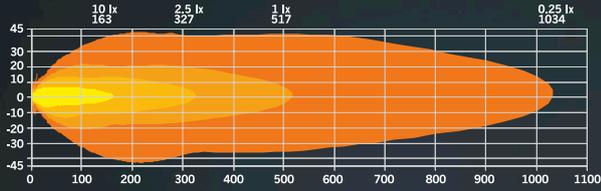


PART NO. 902001

E-MODE

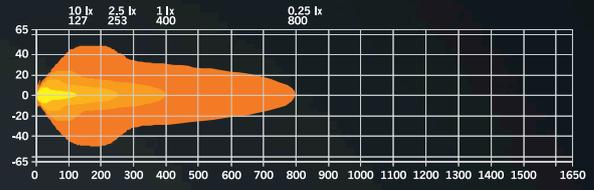


XPERIENCE MODE

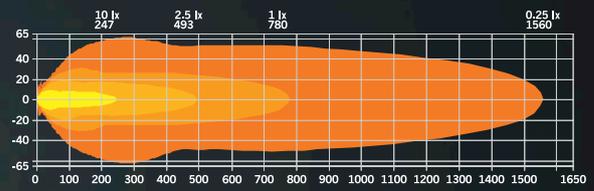


PART NO. 902002

XPERIENCE MODE

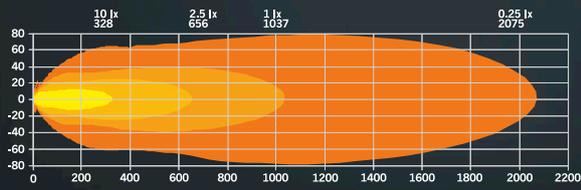


E-MODE

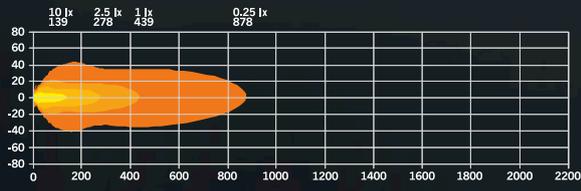


PART NO. 902003

XPERIENCE MODE

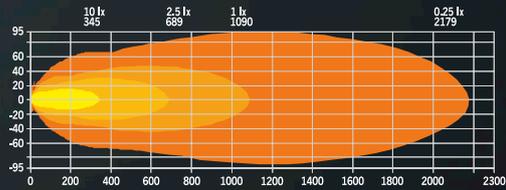

E-MODE

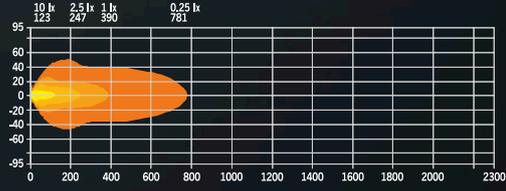

Part No. 907003
Cable harness for XBB

